

TECHNICAL PACKAGE

Style Name: Design Skirt
Style Number: 101OLF20S2

Size Range: 0-18
Sample Size: 0


12/11/2020

Generated by: Andrea Henneman


DESCRIPTION

Multi-gender fully lined mini skirt featuring front pleats, back darts and invisible zipper closure on back.

SKETCH

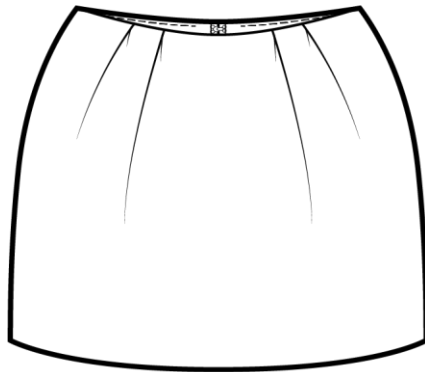

Front

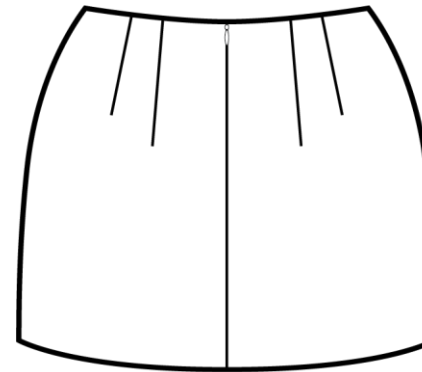

Back

TECHNICAL PACKAGE

Style Name: Design Skirt
Style Number: 101OLF20S2

Size Range: 0-18

Sample Size: 0

12/11/2020

Generated by: Andrea Henneman

BILL OF MATERIALS

FABRIC SWATCHES

SHELL	LINING	INTERFACING
-------	--------	-------------

FABRIC

Category	Type	Content	Width	Yardage	Units	Color
Shell	Plain Weave Cotton	100% Cotton	43"	.888 Yds	1	Green
Lining	Posh	100% Polyester	58"	.472 Yds	1	Black
Interfacing	Pellon Non-woven	100% Polyester	15"	.111 Yds	1	White

FINDINGS

Item	Description	Size/Length	Location	Quantity	Color	Total
Zipper	Coats and Clark INV ZIP #3/7" ZIP		CB	1	Black	1
Shell Thread	Gutterman	Tex 30	Shell	1 Spool	Green	1
Lining Thread	Coats and Clark	Tex 24	Lining	1 Spool	Black	1
Overlock Thread	Maxi-Lock	Tex 27	Shell/Lining	4 Spools	Black	4
Bias tape	Cotton Extra Wide Double Fold	1/2" x 35 1/2"	Hem	.98 Yd	Green	.98 Yd
Hook & Eye	Metal	#1	CB Waist	1 Set	Silver	1 Set

TECHNICAL PACKAGE

Style Name: Design Skirt
 Style Number: 101OLF20S2

Size Range: 0-18
 Sample Size: 0

12/11/2020

Generated by: Andrea Henneman

PATTERN PARTS LIST

	Descriptions	Fabric	Cut #	
1	FRT	Shell	1	
2	BK	Shell	2	
3	FRT FAC	Shell	1	
4	BK FAC	Shell	2	
			Sub-Total Shell A	6
5	FRT LIN	Lining	1	
6	BK LIN	Lining	2	
			Sub-Total Lining	3
7	FRT FAC INT	Fusible Interfacing	1	
8	BK FAC INT	Fusible Interfacing	2	
			Sub-Total Interfacing	3
			Total Pieces	12

TECHNICAL PACKAGE

Style Name: Design Skirt
Style Number: 101OLF20S2

Size Range: 0-18
Sample Size: 0

12/11/2020

Generated by: Andrea Henneman

SEAM ALLOWANCES

	Location
1/4"	Waist
1/2"	Shell hem Shell & Lining: SS, CB, LIN to FAC
1"	Lining hem

TECHNICAL PACKAGE

Style Name: Design Skirt
Style Number: 101OLF20S2

Size Range: 0-18
Sample Size: 0

12/11/2020

Generated by: Andrea Henneman

SEQUENCE OF CONSTRUCTION

PRE-ASSEMBLY

- 1 Fuse FRT & BK FAC
- 2 Pre-stitch pleats on FRT shell
- 3 Pre-stitch tucks on FRT & BK LIN
- 4 Set darts on BK shell
- 5 4-thread OVLK SS & CB of shell & CB of LIN

SHELL

- 6 Install INV ZIP @ CB, join CB from notch to hem, tack ZIP take to SA's
- 7 Join shell SS
- 8 Join FAC SS

LINING

- 9 Join SS & OVLK
- 10 Join CB from ZIP notch to hem
- 11 Set LIN to FAC
- 12 Attach LIN to ZIP tape
- 13 Set FAC to skirt @ waist, understitch, tack FAC to shell @ SS SA
- 14 Set LIN w. 1/2" T.T. hem
- 15 Set shell hem w/bias tape & INV slip-stitch
- 16 Set swing tacks to SS @ hem of shell & LIN
- 17 Set hook & eye @ CB waist

NOTE: SNL at 9 stitches per inch and 4-thread OVLK used throughout unless otherwise specified.